



Stand-off voltage: 24V Max
 Transient protection for each line according to
 IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
 IEC61000-4-5(surge): 5A (8/20 μs)
 Low leakage current
 Low clamping voltage
 Low clamping voltage:
 $V_{CL} = 30\text{V typ. @ IPP} = 16\text{A (TLP)}$
 RoHS Compliant

Cellular Handsets and Accessories
 Personal Digital Assistants
 Notebooks and Handhelds
 Portable Instrumentation
 Digital Cameras
 Peripherals
 Audio Players

Package: DFNO603-2L
 Case Material: "Green" Molding Compound
 Moisture Sensitivity: Level 3 per J-STD-020
 P \AA M

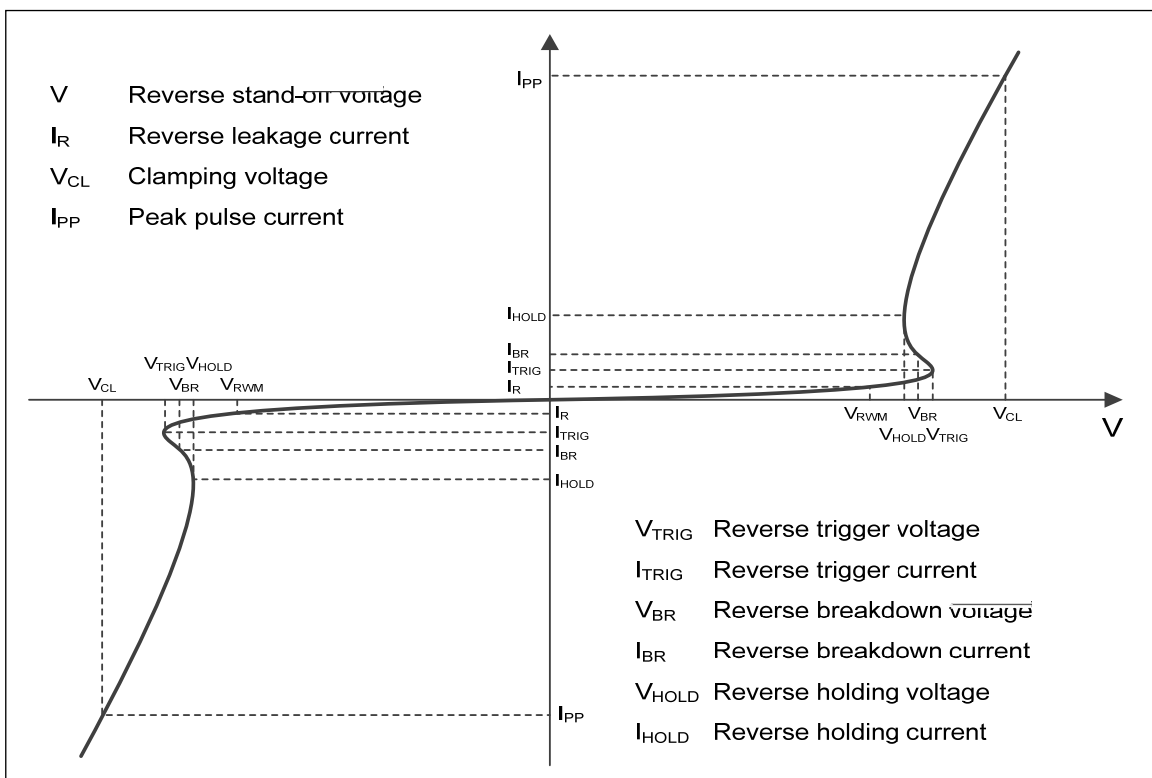



	0.25	0.30	0.35
	0.55	0.60	0.67
	0.28	0.30	0.32
	0.102 BSC		
			0.05
	0.005		

Unit:mm

