



SS22Q THRU SS24Q

Surface Mount Schottky Rectifier

Features

- " /RZ SURILOH SDFNDJH
- " ,GHDO IRUWDHXGWSRDFHFPHQW
- " *XDUGULQJ IRU RYHUYROWDJH SURWHFWLRO
- " /RZ SRZHU ORVVHV KLJK HIILF" 0HHWV 06/ 0
- RI f &
- " 3DUW QR ZLWKHDXQVL\$(% 4 TXDOLILHG

Typical Applications

)RU XVH LQ ORZ YROWDJH KLJK IUHTXHQF\ L
IUHHZKHHOLQJ ' &U' & FRQYHURWHLYH DQG SR
SURWHFWLRO DSSOLFDWLROV

Mechanical Data

- " Package '2 \$\$ 60%
- 0ROGLQJ FRPSR8/QG 9 PHLOVSODWBG33DIDBOV 06
- 67' DQG -(6' %
- " Polarity: &DWKRGH OLVQWKGHRQVW

Maximum Ratings 7D - 8QOHVV RWKHUΔLVH VSHFLILHG

PARAMETER	SYMBOL	UNIT	SS22Q	SS23Q	SS24Q
'HYLFH PDUNLQJ FRGH			66	66	66
5HSHWLWLYH SHDN UHYHUVH YROWDJH	9H0	9			
0D[LPXP 506 YROWDJH	9506	9			
0D[LPXP ' & EORFNLQJ YROWDJH	9&	9			
0D[LPXP DYHUDJH IRUZDUG UHEWLILHG FXUUHQW			DW 7 \$		
6XUJH QRQ UHSHWLWLYH IRUZDUG FXUUHQW					
# +] KD@0•0€(23wDÄp - a					

--	--	--	--

Electrical Characteristics 7D - 8QOHVV RWKHUΔLVH VSHFLILHG

PARAMETER	SYMBOL	TEST CONDITIONS	TYP	MAX	UNIT
,QVWDQWDQHRXV IRUZDUG YROWDJH \$			7. -		9
			7. -		
5HYHUVH FXUUHQW	5	5DWHG 9	7. -		\$
			7.		






SS22Q THRU SS24Q

Thermal Characteristics

PARAMETER	SYMBOL	UNIT	SS22Q	SS23Q	SS24Q
7KHUPDO 5HVLVWDQFH	5 . s	- :			
	5 . /				

Characteristics

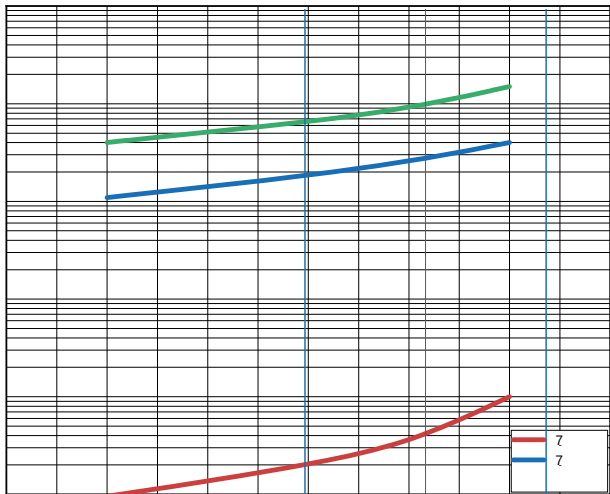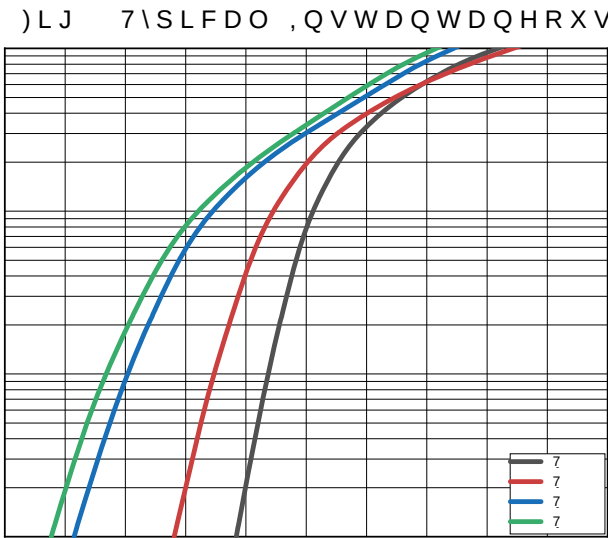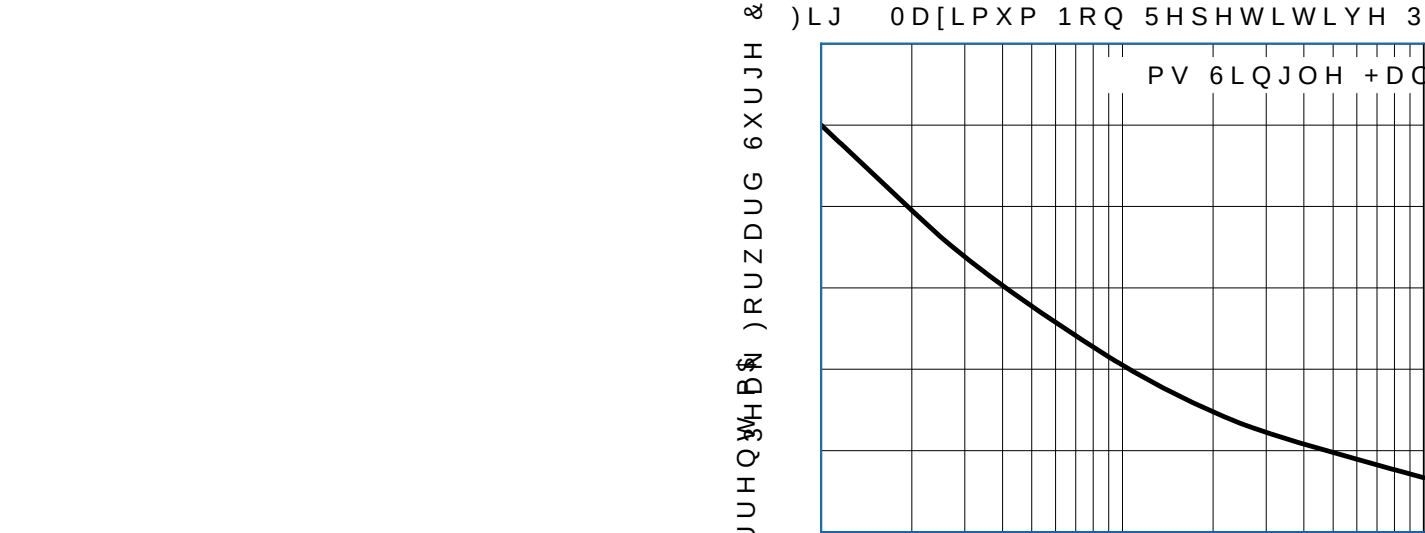

Ordering Information

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS22Q-SS24Q	)	\$SSUR[LPDWH			



SS22Q THRU SS24Q

vOutline Dimensions

DO-214AA(SMB)		
' L P	0 L Q	0 D [
\$		
%		
&		
'	G™•A "É €	

y Suggested pad layout

SS22Q THRU SS24Q