


Surface Mount Schottky Rectifier


Features

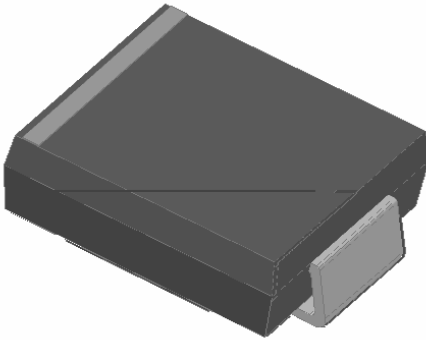

RI f &
" 3 DUW QR Z4WRKHVQIVL\$ (3& 4 TXDOLILHG

Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, automotive and polarity protection applications.



Mechanical Data

- **Package:** DO-214AB (SMC)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	SS56Q
Device marking code			SS56
Repetitive peak reverse voltage	V _{RRM}	V	60
Maximum RMS voltage	V _{RMS}	V	42
Maximum DC blocking voltage	V _{DC}	V	60
Maximum average forward rectified current at T _L (Fig.1)	I _O	A	5.0
Surge(non-repetitive)forward current @60Hz half-sine wave,1 cycle, T _J =25	I _{FSM}	A	120
Voltage rate of change (rated V _R)	dV/dt	V/μs	10000
Storage temperature	T _{stg}		-55 ~+150
Junction temperature and storage temperature	T _J		-55 ~+150

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	TEST CONDITIONS	TYP	MAX	UNIT
Instantaneous forward voltage	V _F	I _F =5A T _J =25	0.6	0.7	V

	J	V _R =4V,f=1MHz	215	-	pF
Reverse recovery time	T _{RR}	IF=0.5A,IR=1A,IRR=0.25A	13		ns



SS56Q

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	SS56Q
Thermal Resistance	$R_{\theta J-A}$	/W	48 ⁽¹⁾
	$R_{\theta J-L}$		13 ⁽¹⁾
	$R_{\theta J-c}$		10

Note(1)

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS56Q	F1	Approximate 0.251	3000	42000	13" reel

■ Characteristics (Typical)

Fig.1:Forward Current Derating Curve

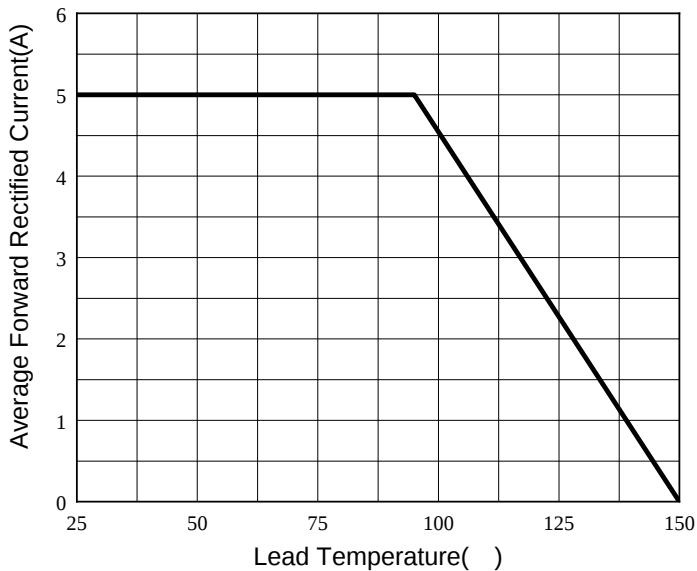


Fig.2:Maximum Non-Repetitive Peak Forward Surge Current

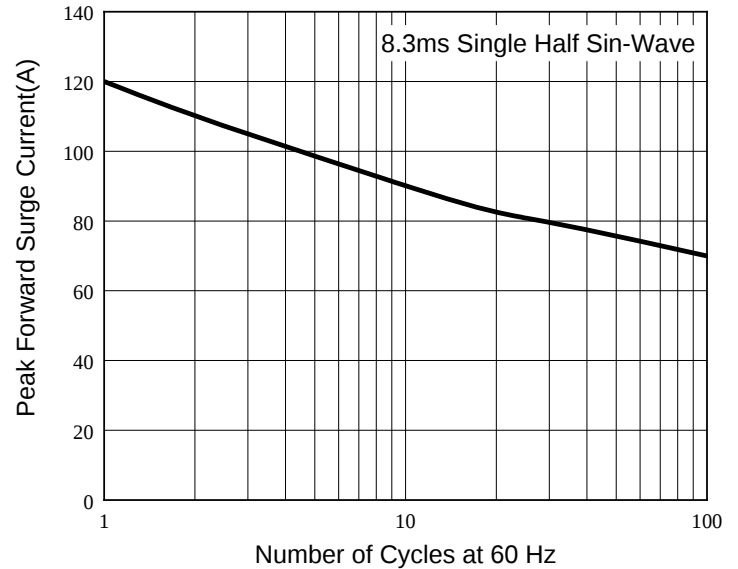


Fig.3:Typical Instantaneous Forward Characteristics


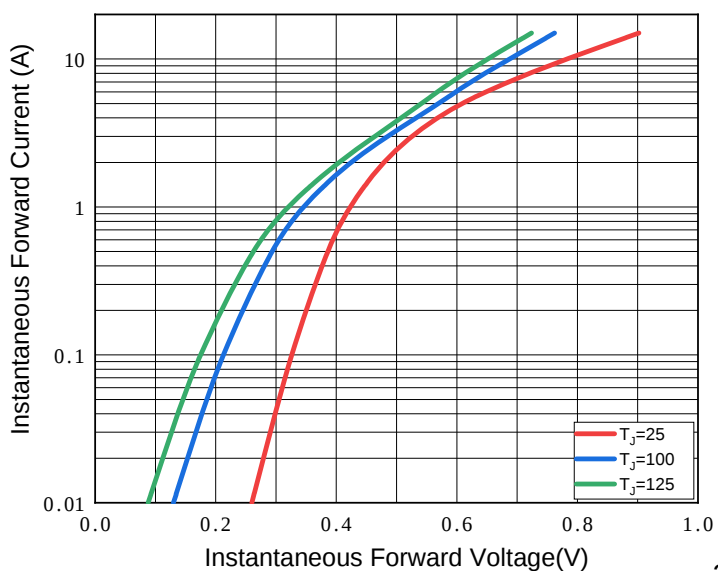


Fig.4:Typical Reverse Leakage Characteristics




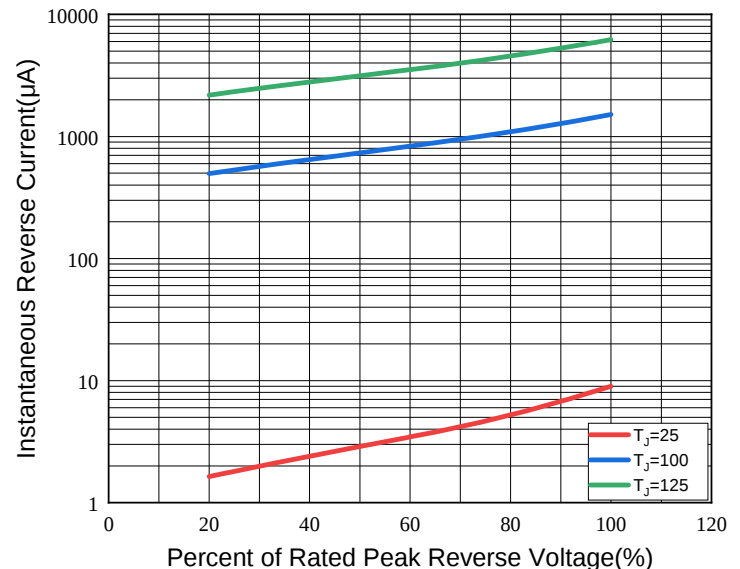

■ Outline Dimensions

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.05	0.20

■ Suggested pad layout

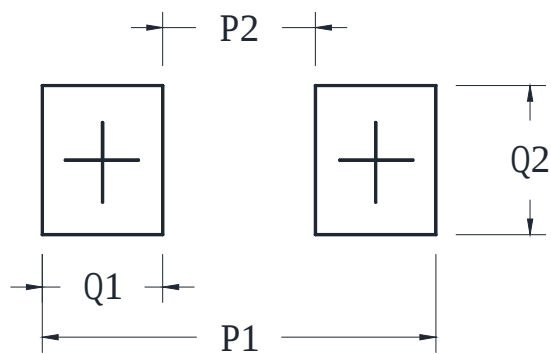

Dim	Typ
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82

Dimensions in millimeters



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.