




- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Designed for general purpose amplifier and low speed switching applications.
- Package: TO-252
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-m

	Symbol	Unit	Value
Device marking code			MJD42C
Collector-Base Voltage	V_{CBO}	V	-100
Collector-Emitter Voltage	V_{CEO}	V	-100
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current -Continuous	I_C	A	-6
Total Device Dissipation (*)	P_D	W	1.25
Thermal Resistance x tion to Ambient Air	R_{thJA}	/W	100
Junction Temperature	T_j		-55 to +150
Storage Temperature	T_{STG}		-55 to +150

(*) Device mounted on FR-4 PCB 15 x 17 x 0.8 mm

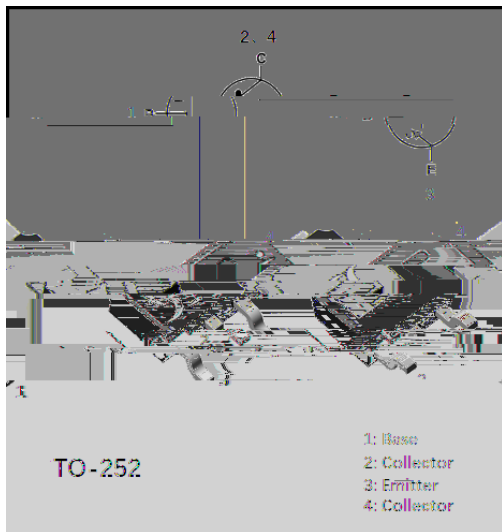

■ (Ta=25 unless otherwise noted)


Collector-base breakdown voltage	V_{CBO}	V	$I_C = -0.1mA, I_E = 0$	-100		
Collector-emitter breakdown voltage	V_{CEO}	V	$I_C = -30mA, I_B = 0$	-100		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E = -0.1mA, I_C = 0$	-5		
Collector-base cut-off current	I_{CEO}	μA	$V_{CE} = -60V, I_B = 0$			-50
Emitter-base cut-off current	I_{EBO}	mA	$V_{EB} = -5V, I_C = 0$			-0.5
DC current gain	h_{FE}		$V_{CE} = -4V, I_C = -1A$	30		
			$V_{CE} = -4V, I_C = -3A$	15		75
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = -6A, I_B = -0.6A$			-1.5
Base-emitter voltage	V_{BE}	V	$I_C = -6A, V_{CE} = -4V$			-2.0

■ (Ta=25 unless otherwise noted)

Transition frequency	f_T	MHz	$V_{CE} = -10V, I_C = -0.5A, f=1KHz$	3		



■ (Typical)

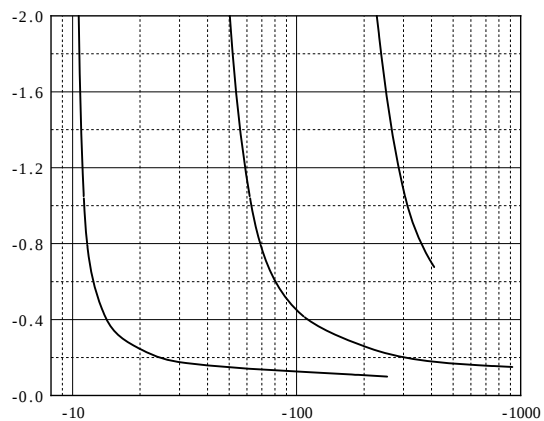



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.