



r

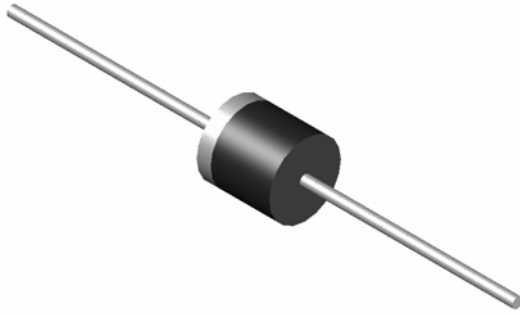

High efficiency
High current capability
High Reliability
High surge current capability
Glass passivated chip junction
Solder dip 275 °C max. 7 s, per JESD 22-B106


R-6

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
: Tin plated leads, solderable per J-STD-002 and JESD22-B102
Color band denotes cathode end

(Ta=25 Unless otherwise specified)

Device marking code	P	HER605	HER606	HER607	HER608					
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	200	300	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	210	280	420	560	700
Maximum DC blocking Voltage	VDC	V	50	100	200	300	400	600	800	1000
Average Forward Current @60Hz sine wave, Resistance load, Ta=65	IF(AV)	A	6.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Tj=25	IFSM	A	200							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			400							
Current squared time @1ms t8.3 ms Tj=25 Rating of per diode	I²t	A²s	166							
Typical junction capacitance @Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	Cj	pF	150			83		81		
Storage Temperature	Tstg		-55 ~ +150							
Junction Temperature	Tj		-55 ~ +150							

Ta=25 Unless otherwise specified



+ (5 * 7 + 58 + (5 *

v7KHUPDO & KDUDFWHULVWDOHQHVV RWKHUÄLVH VSHFLILHG

3\$5\$0(7(5	6<0%2/	81,7	+(5 *	+(5 *	+(5 *	+(5 *	+(5 *	+(5 *	+(5 *	+(5 *
7\SLFDO 7KHUPDO	5HVLVWDOHQFH									

v2UGHULQJ , QIRUPDSQLHQ

35()(5(' 3 1	3\$&.\$*(&2'()	81,7 : (,*+7	0,1,080 3\$&.\$*(SF	,11(5 %2; 48\$17,7< S	287(5 &\$572 48\$17,7< S	'(/,9(5< 02'()
+(5 *a+(5 *	'	\$SSUR[LPDWH				
+(5 *a+(5 *	&	\$SSUR[LPDWH				


7DSH
%XO

v & KDUDFWHULVWDOHQHVV


\$YHUHQW & XUHQW
RUZDUG 2XWSXW & XUHQW
RUZDUG 6XUJH & XUHQW
RUZDUG 9ROWDJH
RUZDUG 7PHSHUDWXUH
RUZDUG 3XOVH ZLGWK
RUZDUG 7M

\$YHUHQW & XUHQW
RUZDUG 6XUJH & XUHQW
RUZDUG 3XOVH ZLGWK
RUZDUG 7M



),* ,R 7D &XUYH

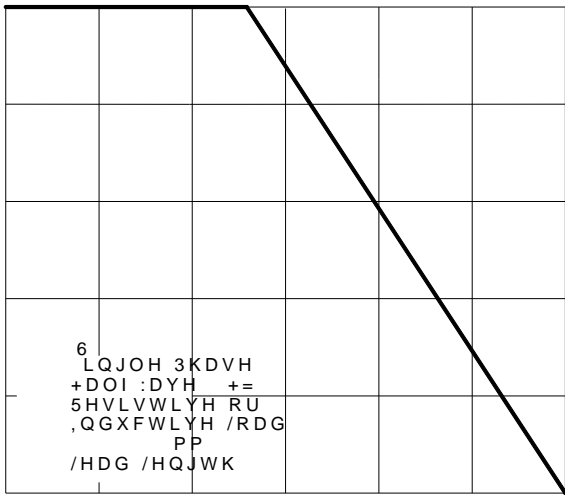

),*)RUZDUG 6XUJH & XUHQW & DSDELO

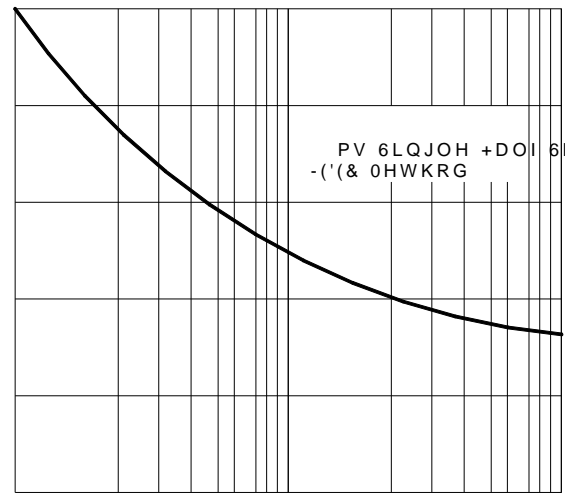

),*)RUZDUG 9ROWDJH

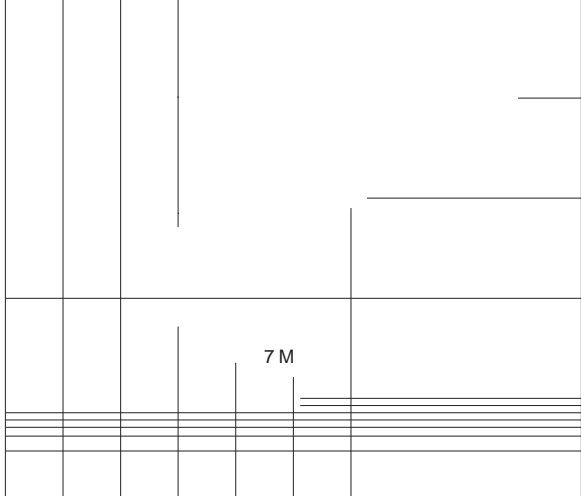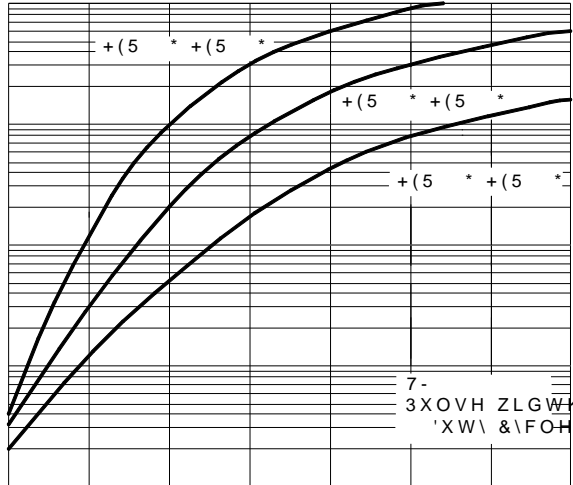

XV

,QVWDQWDQHRXV)RUZDUG



Dim	Min	Max
A	8.60	9.10
B	8.60	9.10
C	25.4	/
D	1.20	1.32



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with