


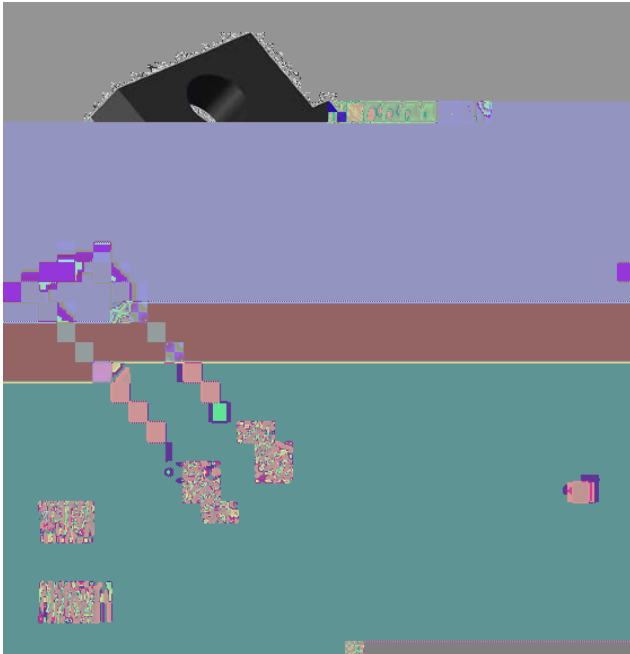

- High frequency operation
- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

- : ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- : As marked

($T_a=25$ Unless otherwise specified)

Device marking code			MUR810F	MUR815F	MUR820F	MUR840F	MUR860F
Repetitive Peak Reverse Voltage	VRRM	V	100	150	200	400	600
Average Rectified Output Current @60Hz half sine-wave, R-load, T_c (FIG.1)	I_o	A	8				
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, $T_a=25$	IFSM	A	100				
	I^2t	A ² s.	41				


T_{stg} -55 ~ +150

		MUR810F	MUR815F			
V	$I_{FM}=8.0A$	0.975		1.3	1.5	
uA	$V_{RM}=V_{RRM}$ $T_a=25$	10				
	$V_{RM}=V_{RRM}$ $T_a=125$	500				
ns	$I_F=0.5A$ $I_{RM}=1A$ $I_{RR}=0.25A$	50				

	SYMBOL	UNIT	MUR810F	MUR815F	MUR820F		
	$R_{\theta J-C}$	W	2.5				



■

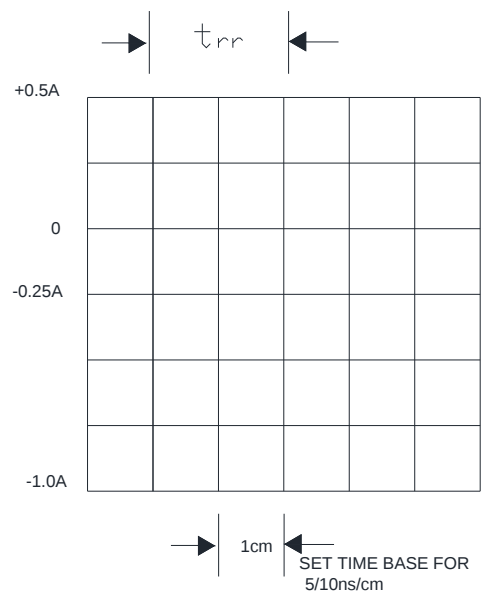



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger Ü

M