


Schottky Diodes

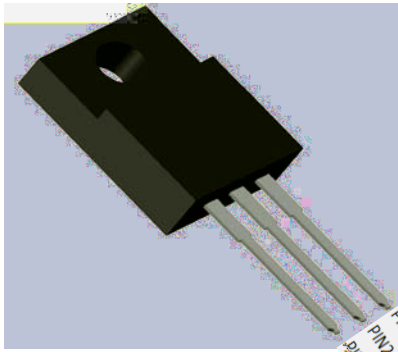

Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** ITO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBR2060FCTS
Device marking code			MBR2060FCTS
Repetitive Peak Reverse Voltage	V _{RRM}	V	60
Average Rectified Output Current @60Hz sine wave, R-load, T _c =90	I _O	A	20
Surge(Non-repetitive)Forward Current @60Hz half sine-wave,1 cycle, T _a =25	I _{FSM}	A	150
Current Squared Time @1ms≤t≤8.3ms T _j =25	I ² t	A ² s	94
Storage Temperature	T _{stg}		-55 ~ +150
Junction Temperature	T _j		-55 ~ +150

■Electrical Characteristics T_a=25

Maximum instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =10.0A	0.75
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	V _{RM} =V _{RRM} T _a =25	0.2
	I _{RRM2}		V _{RM} =V _{RRM} T _a =125	50

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS



MBR2060FCTS

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL
-----------	--------



MBR2060FCTS

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to i