



Schottky Diodes

Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Gu in plated leads, solderable per

J-STD-002 and JESD22-B102

- **Polarity:** As marked

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	MBR30200PT
Device marking code			MBR30200PT
Repetitive Peak Reverse Voltage	V _{RRM}	V	200
Average Rectified Output Current @60Hz sine wave, R-load, T _c =148	I _O	A	30
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25	I _{FSM}	A	250
Current Squared Time @1ms≤t≤8.3ms T _j =25	I ² t	A ² s	

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Peak Forward Voltage	V _{FM}	V	I _{FM} =15.0A T _j =25	0.5	0.83	0.9
			I _{FM} =15.0A T _j =125	-	0.745	0.82
DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	V _{RM} =V _{RRM} T _j =25	-	-	0.1
	I _{RRM2}		V _{RM} =V _{RRM} T _j =125	-	-	20
Junction capacitance	C _j	pF	1MHz and Applied Reverse Voltage of 4.0 V.D.C	150	240	500




MBR30200PT

■Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER		SYMBOL	UNIT	MBR30200PT
Thermal Resistance	Between junction and ambient	$R_{\theta J-A}$	/W	50.0
	Between junction and case	$R_{\theta J-C}$	/W	1.0

■Characteristics (Typical)

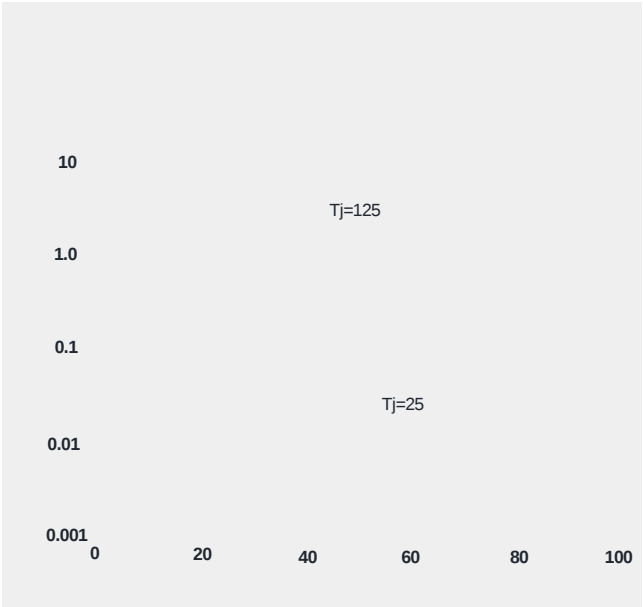



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use " &